

Beam S Trimless

LED / 2700K / 6W / 600lm / Medium 28° /
Ø75x124mm / On/Off

28045

Design: O/M

Ceiling-recessed luminaire made of aluminium.

Fixed version.


IP54 acrylic diffuser supplied separately.

Recessing accessories supplied separately.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / power supply included
IP20/ IP54 versions with diffuser | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power	6W	600lm	7,5W
Flux	600lm	100lm/W	325lm
Efficiency	100lm/W	-	43lm/W
LOR	-	-	54%
UGR	-	-	<13

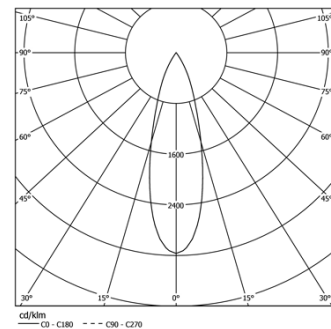

Beam angle
Medium 28°


Application



Weight
0,26Kg

mm

Ø82

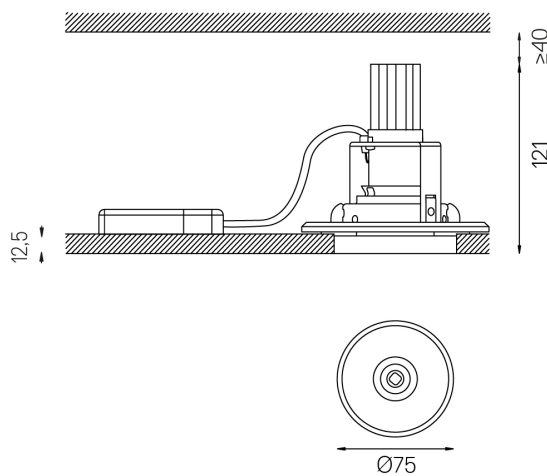

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Not included

28776 Recessing accessory

Optional accessories

28782 IP54 Clear diffuser


For fixed versions: medium and flood

Beam S Trimless

Recessing accessory

28776

1mm

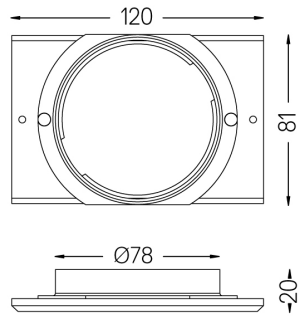

Beam S recessing accessory

Weight
0,03Kg


Finishes
○ .01 White / RAL 9010

Beam S Trimless

Clear diffuser

28782

1mm

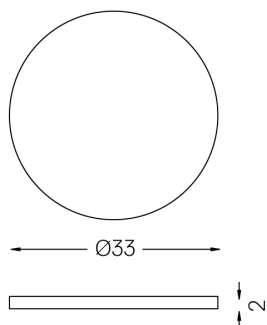

Beam S IP54 clear diffuser

Weight
0,003Kg