

U45 Wall-mounted direct

32W / 4700lm / 3000K / DALI / 2350mm

31155

! Code no longer in production

Design: Eduardo Souto de Moura
Wall luminaire with housing made of anodised aluminium profile with matt or textured-paint finish. Frosted polycarbonate diffuser with user friendly clipping system and double fitting system: flushed or recessed.


5mm aluminium end caps.

Supplied with fitting accessories.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP40 | 230Vac | 50/60Hz

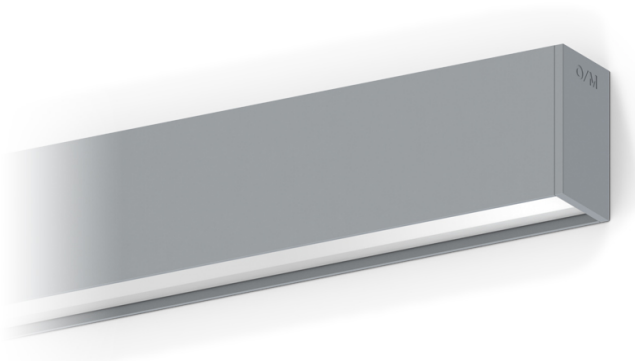

LED	3000K	Light Source	Luminaire
Power		32W	35,6W
Flux		4700lm	2800lm
Efficiency		147lm/W	79lm/W
LOR		-	60%
UGR		-	<25

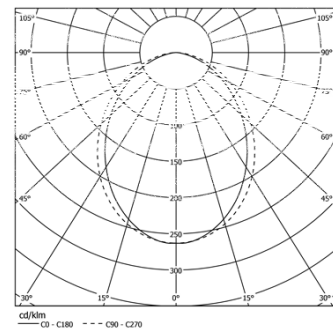

Beam angle

-

Application



Weight

4Kg

mm

Finishes

○ .01 White / RAL 9010

● .02 Black / RAL 9005

● .10 Anodised aluminium

● .00 RAL on request

