

Design: O/M + Bartenbach GmbH

Recessed luminaire with housing and perforated cover plate made of aluminium with textured-paint finish.


Aluminium end caps.

Easy recessing system with spring clips.


LED CRI>90 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz

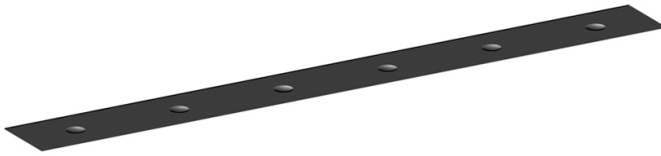

LED	2700K	Light Source	Luminaire
Power	13,5W		15W
Flux	1200lm		910lm
Efficiency	89lm/W		61lm/W
LOR	-		76%
UGR	-		<19



Beam angle
Wide flood 50°


Application



Weight

mm

26x293

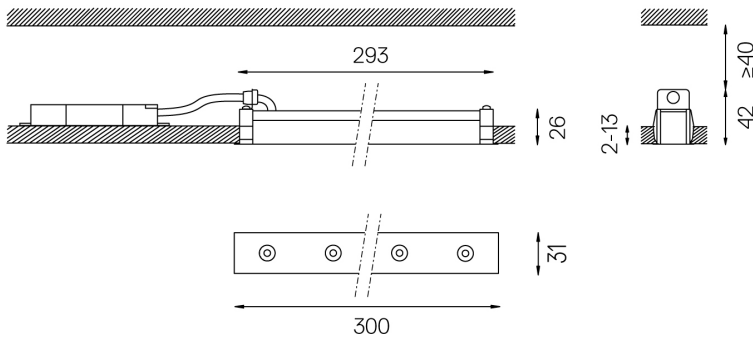

Finishes

○ .01 White / RAL 9010

● .02 Black / RAL 9005