

Beam Trimless / Fixed

IP20 / IP54 version with diffuser | 230Vac | 50/60Hz



Codes

Beam S Trimless

28045	28046	28048	28049	28051	28052
28632	28633	28634	28791	28792	28793
28794	28795	28796	28980	28981	28982

Beam M Trimless


28063	28064	28066	28067	28069	28070
28668	28669	28670	28875	28876	28877
28878	28879	28880	28986	28987	28988

Beam L Trimless

28080	28081	28082	28083	28084	28085
28086	28087	28088	28098	28099	28100
28101	28102	28103	28104	28105	28106
28704	28705	28706	28740	28741	28742
28890	28891	28892	28893	28894	28895
28896	28897	28898	28908	28909	28910
28911	28912	28913	28914	28915	28916
28992	28993	28994	28998	28999	29500

Accessories

28776	28777	28778
-------	-------	-------

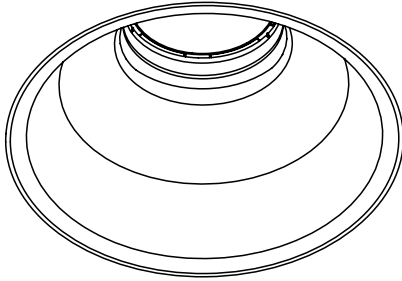

Installation Instructions

01


02

Beam S	Ø82mm	110mm
Beam M	Ø108mm	140mm
Beam L	Ø148mm	175mm


03

04


05





06

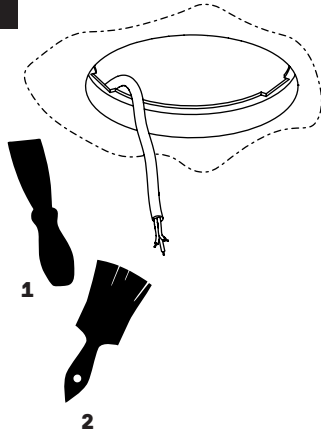



07

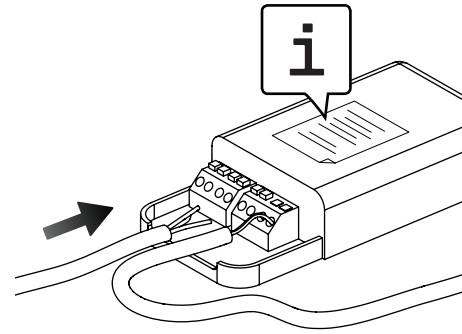



08

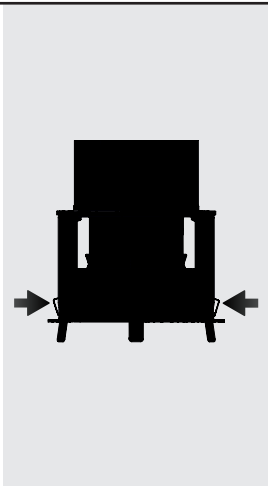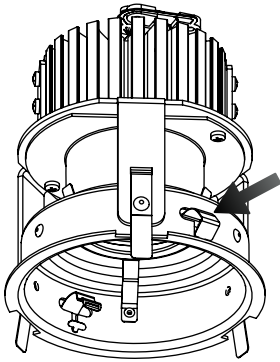

09

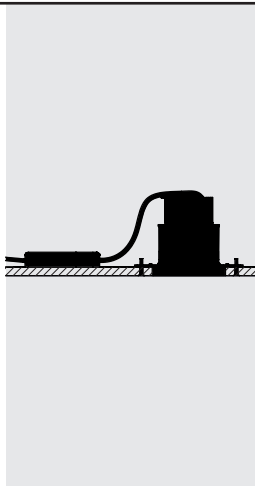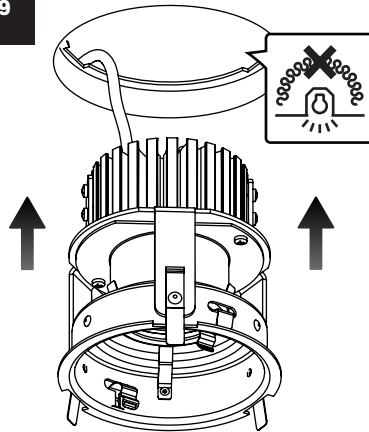

10

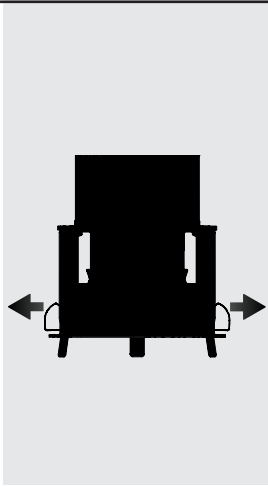

11

