


Onit


LED CRI>80, 2700K CRI>90 / 50.000h, L80/B10
3-step MacAdam | Power supply included
IP20 | 230Vac | 50/60Hz



Onit Recessed

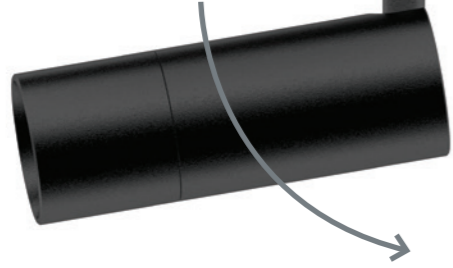

Onit Surface-mounted

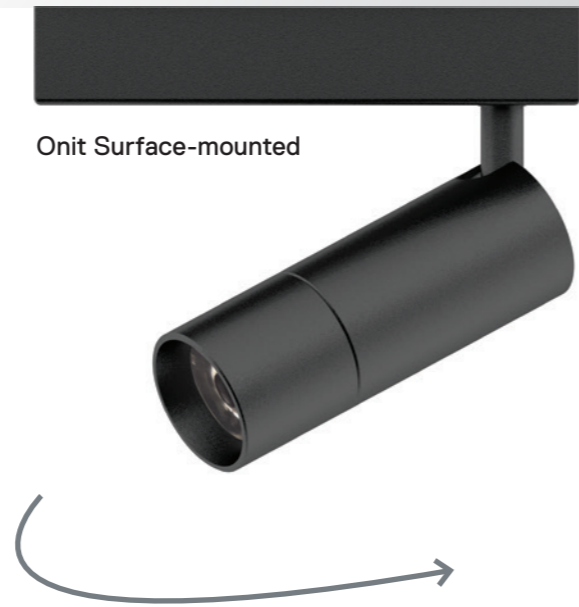

Onit Track




Onit Sys



Onit

Discreet and functional, O/M's new adjustable spotlight expands creative possibilities in lighting design. Available in four applications, it offers a wide range of uses in different ambiances.

With three snoot sizes, 13° spot or 30° medium optics, or elliptical effect by means of a reflector, plus the possibility of a louvre or soft diffuser, Onit is ideal for light modelling with spotlights.

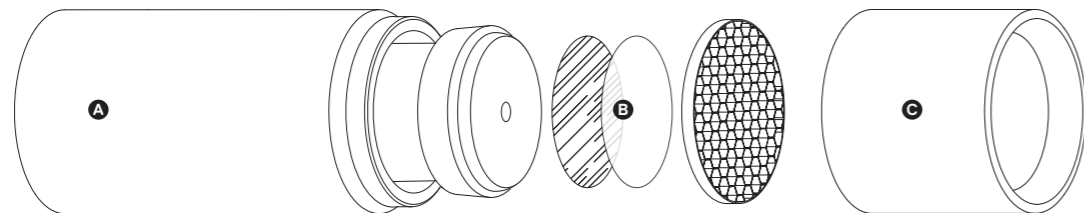

A Body (Ø45x89mm)

B Accessories

C Snoot

Adjustable

The spotlight can be rotated up to 90° horizontally and 330° vertically.

Dimmable

Available with DALI dimming system and on-board dimmer in the Surface-mounted and track-mounted versions.

Customisable

The aluminium body can be used with a number of accessories that are simply and quickly applied and changed at any time, customising its light effect.

Light Source

High-efficiency LED modules up to 140 lm/W. Available in 2700K, 3000K and 4000K.

Snoot

The three cut-off options for Onit have been designed to provide greater visual comfort, whatever its application.

Accessories

Available separately and easily applicable after installation, Onit accessories can be used for final adjustments in light modelling.

Finish

Aluminium body with textured-paint finish, available in black and white.

	Spot 13°		Snoot 42 Ø45x42 mm		Elliptical reflector		White
	Medium 30°		Snoot 55 Ø45x55 mm		Soft diffuser		Black
	Elliptical		Snoot 72 Ø45x72 mm		Louvre		