


26W / 2000lm / 3000K / DALI / Diffuse /  
563mm

44146

Design: O/M  
LED-Lichtquelle mit guter Farbkonsistenz und hoher  
Betriebslebensdauer.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Inklusive Stromversorgung.  
IP20 | 230Vac | 50/60Hz

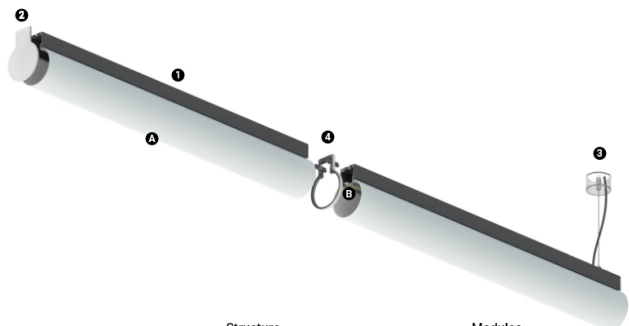

#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling


#### Modules

A Polycarbonate Diffuser

#### LED Light Sources

B See multiple options

LED	3000K	Lichtquelle	Leuchte
Leistung		26W	31,7W
Strom		2900lm	2000lm
Effizienz		112lm/W	63lm/W
LOR		-	69%
UGR		-	<22



Abstrahlwinkel  
Diffuse

Anwendung



Gewicht  
0,95Kg



Ausführungen

