


38W / 3300lm / 4000K / DALI / Diffuse /  
845mm

44158

Design: O/M  
LED-Lichtquelle mit guter Farbkonsistenz und hoher  
Betriebslebensdauer.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Inklusive Stromversorgung.  
IP20 | 230Vac | 50/60Hz

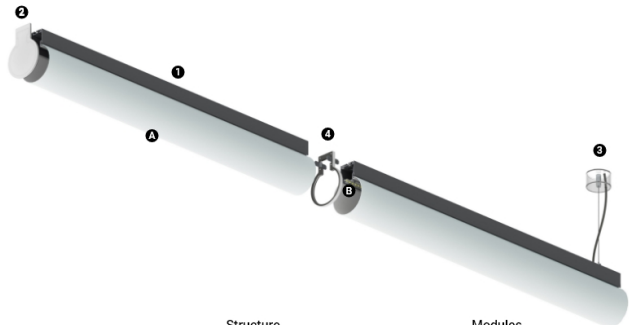

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling


Modules

A Polycarbonate Diffuser

LED Light Sources

B See multiple options

LED 4000K	Lichtquelle	Leuchte
Leistung	38W	44,7W
Strom	4750lm	3300lm
Effizienz	125lm/W	74lm/W
LOR	-	69%
UGR	-	<22



Abstrahlwinkel  
Diffuse



Gewicht  
1,86Kg



Ausführungen

