

34W / 2875lm / 3000K / DALI / Diffuse /  
1399mm

61361

Design: O/M  
LED light source with good colour consistency and  
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



- Structure**
  - 1 Profile
  - 2 End caps
  - 3 Fitting accessories
  - 4 Profile coupling
- Diffuser**
  - A Polycarbonate frost diffuser
- Light Source**
  - B LED Modules


LED	3000K	Light Source	Luminaire
Power		34W	40W
Flux		6125lm	2875lm
Efficiency		180lm/W	72lm/W
LOR		-	47%
UGR		-	<25



Beam angle  
Diffuse

Application

Weight  
0,58Kg

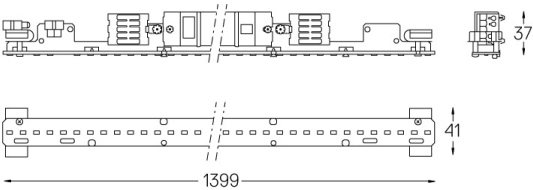

Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603211, 89603216