

17W / 1560lm / 3000K / DALI / Diffuse /  
699mm

60897

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Diffuser

- A Polycarbonate frost diffuser

#### Light Source

- B LED Modules

LED	3000K	Light Source	Luminaire
Power		17W	20,7W
Flux		3060lm	1560lm
Efficiency		180lm/W	75lm/W
LOR		-	51%
UGR		-	<28




Beam angle  
Diffuse

#### Application



Weight  
0,5Kg

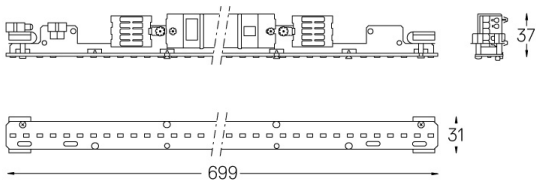

#### Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603206, 89603216