


16W / 740lm / 3000K / DALI / Wallwasher / 600mm

61249

Design: O/M + Bartenbach GmbH  
LED light source with excellent colour consistency and long operation lifespan.  
Asymmetrical aluminium reflector.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / power supply included.  
IP20 | 230Vac | 50/60Hz

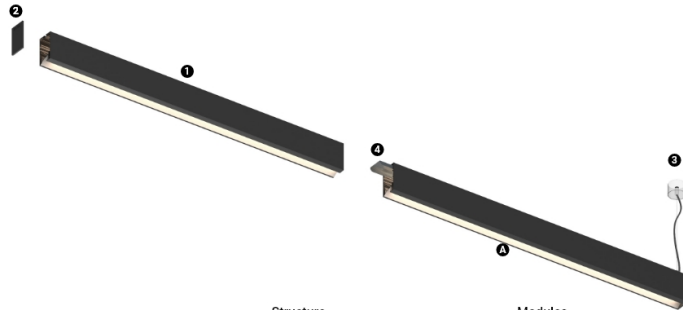


#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling


#### Modules

- A Uw modules

LED	3000K	Light Source	Luminaire
Power		16W	19W
Flux		1600lm	740lm
Efficiency		100lm/W	39lm/W
LOR		-	46%
UGR		-	-

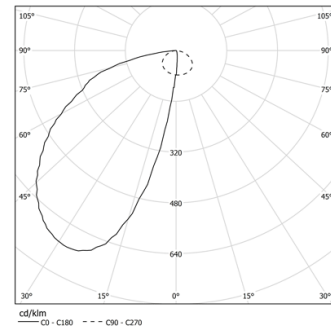

mm



#### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com