

7,9W / 670lm / 3000K / DALI / Diffuse /
559mm

61350

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser

- A Polycarbonate frost diffuser

Light Source

- B LED Modules

LED	3000K	Light Source	Luminaire
Power		7,9W	9,9W
Flux		1430lm	670lm
Efficiency		181lm/W	68lm/W
LOR		-	47%
UGR		-	<25




Beam angle
Diffuse

Application



Weight
0,5Kg

mm

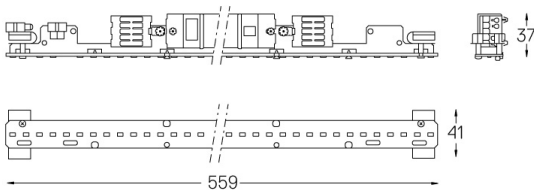

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class C Model Identifier 89603216