


7,9W / 670lm / 3000K / DALI / Diffuse /
559mm

61350

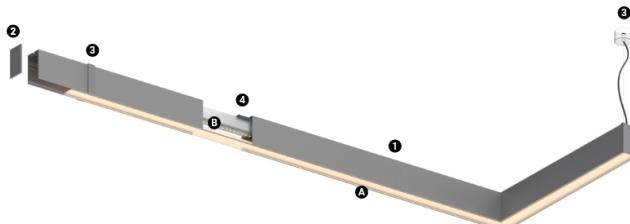

| Structure | Diffuser |
|-----------------------|-----------------------|
| 1 Profile | A Polycarbonate frost |
| 2 End caps | diffuser |
| 3 Fitting accessories | |
| 4 Profile coupling | B LED Modules |

Design: O/M
LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



LED 3000K


Light Source Luminaire

| | | |
|------------|---------|--------|
| Power | 7,9W | 9,9W |
| Flux | 1430lm | 670lm |
| Efficiency | 181lm/W | 68lm/W |
| LOR | - | 47% |
| UGR | - | <25 |



Beam angle
Diffuse

Application



Weight
0,5Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class C
Model Identifier 89603216