


15W / 1315lm / 3000K / DALI / Diffuse /
629mm

61947

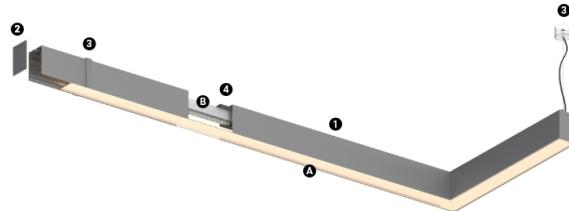

Structure
1 Profile
2 End caps
3 Fitting accessories
4 Profile coupling

Diffuser
A Polycarbonate frost diffuser
Light Source
B LED Modules

Design: O/M
LED light source with good colour consistency and long operation lifespan.


LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



LED 3000K


Light Source Luminaire

Power	15W	18,3W
Flux	2760lm	1315lm
Efficiency	184lm/W	72lm/W
LOR	-	48%
UGR	-	<25



Beam angle
Diffuse

Application



Weight
0,5Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603203, 89603216

