

41W / 3510lm / 3000K / DALI + E-KIT /
Diffuse / 1679mm

61959

Design: O/M


LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




- | | |
|-----------------------|--------------------------------|
| Structure | Diffuser |
| 1 Profile | A Polycarbonate frost diffuser |
| 2 End caps | |
| 3 Fitting accessories | Light Source |
| 4 Profile coupling | B LED Modules |

LED	3000K	Light Source	Luminaire
Power		41W	48,2W
Flux		7350lm	3510lm
Efficiency		179lm/W	73lm/W
LOR		-	48%
UGR		-	<25




Beam angle
Diffuse

Application



Weight
0,8Kg

mm

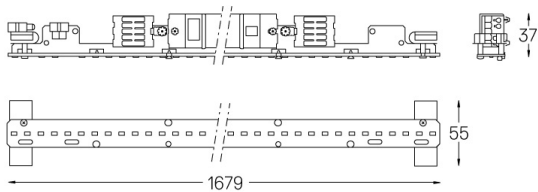

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C Model Identifier 89603216