


38W / 2800lm / 3000K / DALI / Diffuse /
1143mm

62136

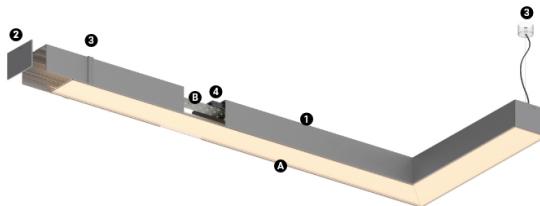

Structure
1 Profile
2 End caps
3 Fitting accessories
4 Profile coupling

Diffuser
A Polycarbonate frost diffuser
Light Source
B LED Modules

Design: O/M
LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



3000K

Light Source

Luminaire

Power

38W

34,1W

Flux

4520lm

2800lm

Efficiency

161lm/W


82lm/W

LOR

62%


UGR

<25



Beam angle
Diffuse

Application



Weight
0,57Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class D
Model Identifier WU-M-536-S-BC-830

