

Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




	3000K	Lichtquelle	Leuchte
Leistung	20W		24W
Strom	2520lm		2040lm
Effizienz	127lm/W		87lm/W
LOR	-		0.8100000000000001
UGR	-		<19



Abstrahlwinkel  
Wide flood 80°

Anwendung

Gewicht

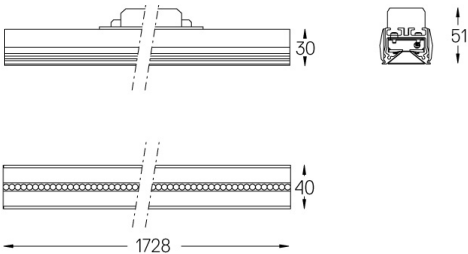

Ausführungen

○ .01 Weiß / RAL 9010

● .02 Schwarz / RAL 9005