


51W / 4100lm / 3000K / On/Off / Diffuse /
1127mm

44125

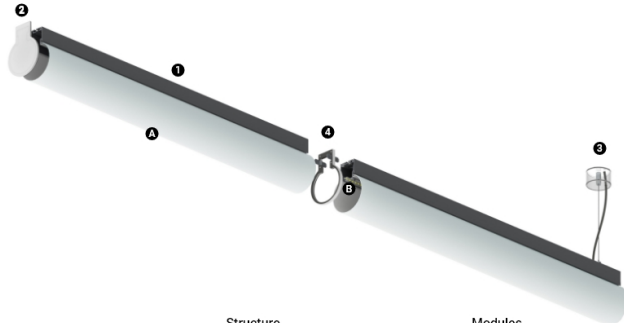

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules

A Polycarbonate Diffuser

LED Light Sources

B See multiple options


Design: O/M

LED-Lichtquelle mit guter Farbkonsistenz und hoher Betriebslebensdauer.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Inklusive Stromversorgung.
IP20 | 230Vac | 50/60Hz



LED	3000K	Lichtquelle	Leuchte
Leistung		51W	60W
Strom		5850lm	4100lm
Effizienz		115lm/W	68lm/W
LOR		-	70%
UGR		-	<22



Abstrahlwinkel
Diffuse

Anwendung



Gewicht
1,86Kg

mm

Ausführungen

