


51W / 4400lm / 4000K / DALI / Diffuse /
1127mm

44128

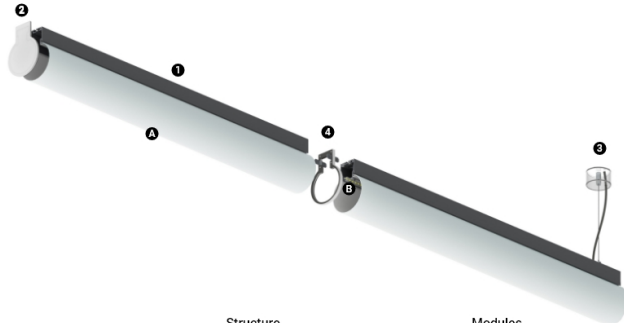

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules

A Polycarbonate Diffuser

LED Light Sources

B See multiple options


Design: O/M

LED-Lichtquelle mit guter Farbkonsistenz und hoher Betriebslebensdauer.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Inklusive Stromversorgung.
IP20 | 230Vac | 50/60Hz



LED	4000K	Lichtquelle	Leuchte
Leistung	51W	6300lm	60W
Strom	6300lm	4400lm	
Effizienz	124lm/W	73lm/W	
LOR	-	70%	
UGR	-	<22	



Abstrahlwinkel
Diffuse

Anwendung



Gewicht
2,3Kg

mm

Ausführungen

