


63W / 5100lm / 3000K / DALI / Diffuse /  
1409mm

44136

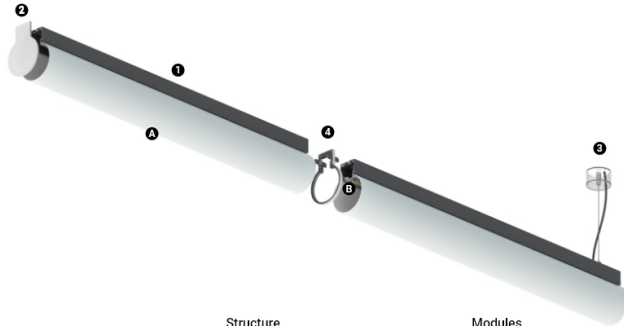

#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Modules

A Polycarbonate Diffuser

#### LED Light Sources

B See multiple options


Design: O/M

LED-Lichtquelle mit guter Farbkonsistenz und hoher Betriebslebensdauer.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Inklusive Stromversorgung.  
IP20 | 230Vac | 50/60Hz



LED	3000K	Lichtquelle	Leuchte
Leistung	63W	74,1W	
Strom	7300lm	5100lm	
Effizienz	116lm/W	69lm/W	
LOR	-	70%	
UGR	-	<22	



Abstrahlwinkel  
Diffuse

Anwendung



Gewicht  
3,66Kg

mm

Ausführungen

