


63W / 5550lm / 4000K / On/Off / Diffuse /
1409mm

44139

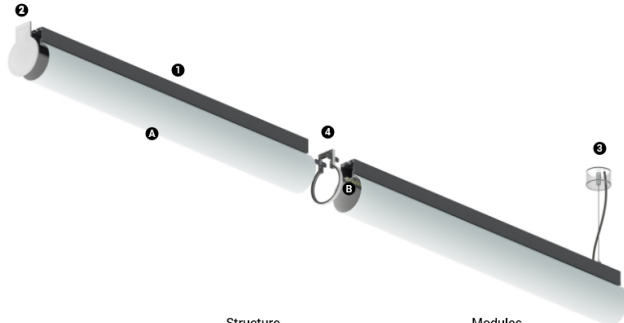

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules

A Polycarbonate Diffuser

LED Light Sources

B See multiple options


Design: O/M

LED-Lichtquelle mit guter Farbkonsistenz und hoher Betriebslebensdauer.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Inklusive Stromversorgung.
IP20 | 230Vac | 50/60Hz



LED	4000K	Lichtquelle	Leuchte
Leistung		63W	74,1W
Strom		7900lm	5550lm
Effizienz		125lm/W	75lm/W
LOR		-	70%
UGR		-	<22



Abstrahlwinkel
Diffuse

Anwendung



Gewicht
2,3Kg

mm

Ausführungen

