


26W / 2200lm / 4000K / DALI / Diffuse /  
563mm

44148

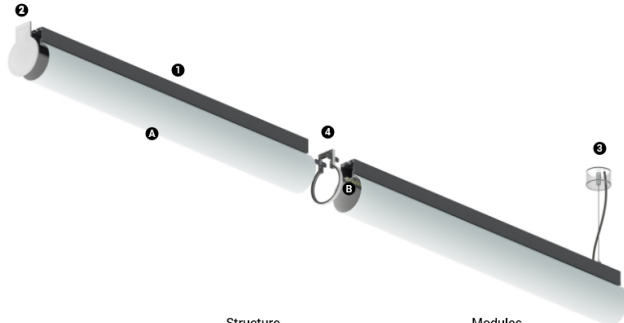

#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Modules

A Polycarbonate Diffuser

#### LED Light Sources

B See multiple options


Design: O/M

LED-Lichtquelle mit guter Farbkonsistenz und hoher Betriebslebensdauer.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Inklusive Stromversorgung.  
IP20 | 230Vac | 50/60Hz



LED	4000K	Lichtquelle	Leuchte
Leistung	26W	31,7W	
Strom	3150lm	2200lm	
Effizienz	121lm/W	69lm/W	
LOR	-	70%	
UGR	-	<22	



Abstrahlwinkel  
Diffuse

Anwendung



Gewicht  
0,95Kg

mm

Ausführungen

