


38W / 3050lm / 3000K / On/Off / Diffuse /
845mm

44155

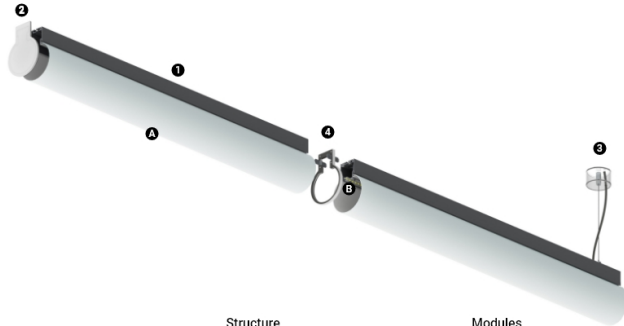

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules

A Polycarbonate Diffuser

LED Light Sources

B See multiple options


Design: O/M

LED-Lichtquelle mit guter Farbkonsistenz und hoher Betriebslebensdauer.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Inklusive Stromversorgung.
IP20 | 230Vac | 50/60Hz



| LED | 3000K | Lichtquelle | Leuchte |
|-----------|---------|-------------|---------|
| Leistung | 38W | 4350lm | 44,7W |
| Strom | 4350lm | 3050lm | 3050lm |
| Effizienz | 114lm/W | 68lm/W | 68lm/W |
| LOR | - | - | 70% |
| UGR | - | - | <22 |



Abstrahlwinkel
Diffuse

Anwendung



Gewicht
0,95Kg

mm

Ausführungen

