


38W / 3300lm / 4000K / On/Off / Diffuse /
845mm

44159

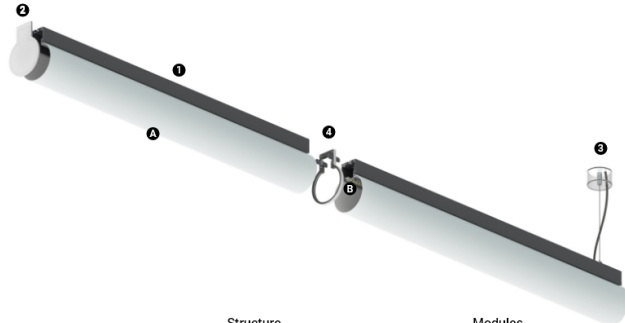

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules

A Polycarbonate Diffuser

LED Light Sources

B See multiple options


Design: O/M

LED-Lichtquelle mit guter Farbkonsistenz und hoher Betriebslebensdauer.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Inklusive Stromversorgung.
IP20 | 230Vac | 50/60Hz



LED	4000K	Lichtquelle	Leuchte
Leistung	38W	4750lm	44,7W
Strom	4750lm	3300lm	3300lm
Effizienz	125lm/W	74lm/W	74lm/W
LOR	-	69%	69%
UGR	-	<22	<22



Abstrahlwinkel
Diffuse

Anwendung



Gewicht
0,95Kg

mm

Ausführungen

