


20W / 2040lm / 3000K / DALI / Flood 65° /
1747mm


61163

Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

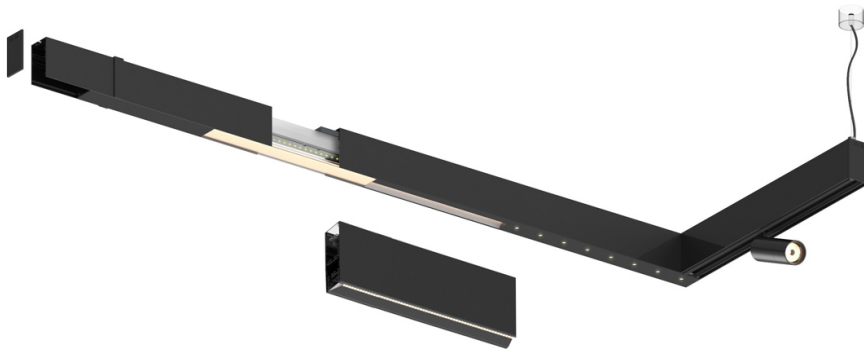


| LED | 3000K | Lichtquelle | Leuchte |
|-----------|---------|--------------------|---------|
| Leistung | 20W | 24W | |
| Strom | 2520lm | 2040lm | |
| Effizienz | 127lm/W | 87lm/W | |
| LOR | - | 0.8100000000000001 | |
| UGR | - | <13 | |

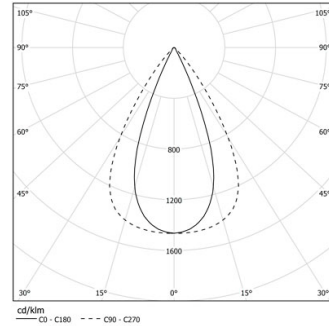

Abstrahlwinkel
Flood 65°

Anwendung

Gewicht

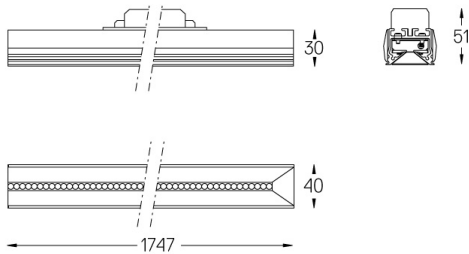

Ausführungen

- .01 Weiß / RAL 9010
- .02 Schwarz / RAL 9005