



Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

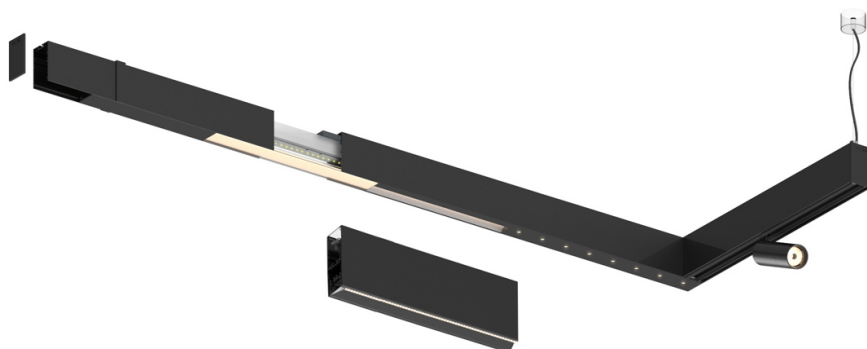


LED	4000K	Lichtquelle	Leuchte
Leistung	22W	3000lm	25W
Strom	3000lm	2400lm	
Effizienz	142lm/W	97lm/W	
LOR	-	0.8	
UGR	-	<19	



Abstrahlwinkel
Wide flood 80°

Anwendung

Gewicht

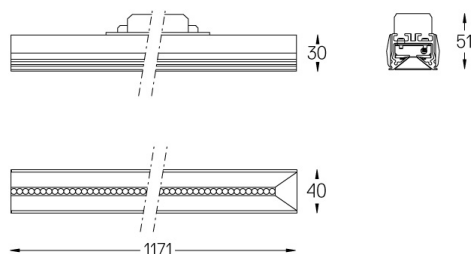

Ausführungen

- .01 Weiß / RAL 9010
- .02 Schwarz / RAL 9005