



Design: O/M + Bartenbach GmbH

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

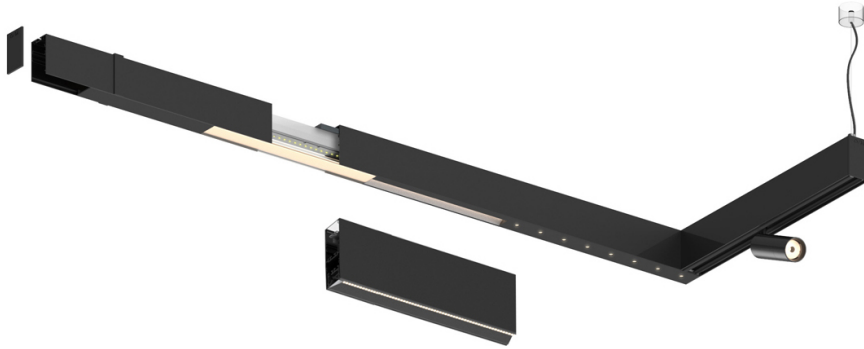


LED	2200K-5000K	Lichtquelle	Leuchte
Leistung	28W*	3650lm*	33W*
Strom	3650lm*	2900lm*	
Effizienz	120lm/W	85lm/W	
LOR	-	0.8273381294964028	
UGR	-	<13	

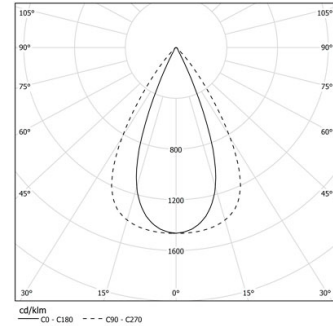

Abstrahlwinkel  
Flood 65°

Anwendung

Gewicht

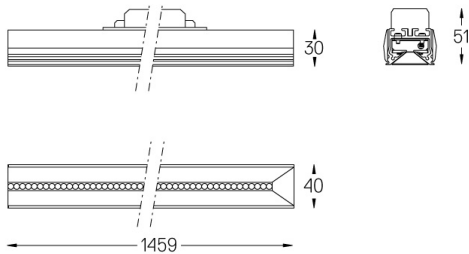

### Ausführungen

- .01 Weiß / RAL 9010
- .02 Schwarz / RAL 9005