



Design: Álvaro Siza

Emergency surface luminaire with body made of stainless steel with brushed finish or electrostatic 100% polyester paint with textured-finish.

Pictogram, with acrylic structure and adhesive film, supplied separately.

The same luminaire allows maintained or non-maintained mode.

Luminaire with self-testing mode.

Prepared for remote control (rest mode).

3-hour autonomy.

Compliant with the following standards:

EN60598-2-22 / EN60598-1 / UNE 20392

Power supply included.

IP22 | 230Vac | 50/60Hz




| LED        | 5000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 2,4W         | 3,1W      |
| Flux       |       | 340lm        | 65lm      |
| Efficiency |       | 142lm/W      | 21lm/W    |
| LOR        |       | -            | 19%       |
| UGR        |       | -            | -         |



Beam angle  
-

Application

Weight  
2Kg

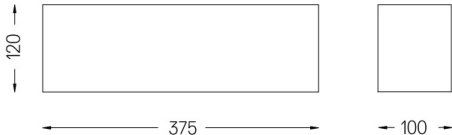

- Finishes
- .01 White / RAL 9010
  - .02 Black / RAL 9005
  - .12 Brushed stainless steel

- Mandatory
- 16000
  - 16010
  - 16020
  - 16030
  - 16040
  - 16050