



Design: Álvaro Siza

Emergency recessed luminaire with body made of stainless steel with brushed finish or electrostatic 100% polyester paint with textured-finish.

Pictogram, with acrylic structure and adhesive film, supplied separately.

The same luminaire allows maintained or non-maintained mode.

Luminaire with self-testing mode.

Prepared for remote control (rest mode).

3-hour autonomy.

Compliant with the following standards:

EN60598-2-22 / EN60598-1 / UNE 20392

Power supply included.

IP22 | 230Vac | 50/60Hz



| LED | 5000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 2,4W | 3,1W |
| Flux | | 340lm | 65lm |
| Efficiency | | 142lm/W | 21lm/W |
| LOR | | - | 19% |
| UGR | | - | - |




Beam angle
-

Application

Weight
1,6Kg

mm 375x120

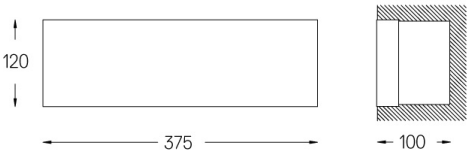

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .12 Brushed stainless steel

Mandatory

16000

16010

16020

16030

16040

16050