



Design: Eduardo Souto de Moura  
Emergency luminaire with body made of polycarbonate.  
Pictogram, with acrylic structure and adhesive film, supplied separately.  
The same luminaire allows maintained or non-maintained mode.  
Luminaire with self-testing mode.  
Prepared for remote control (rest mode).  
3-hour autonomy.  
Compliant with the following standards:  
EN60598-2-22/ EN60598-1 / UNE 20392


Power supply included.  
IP67 | IK08 | 230Vac | 50/60Hz



LED	5000K	Light Source	Luminaire
Power		2,4W	3,1W
Flux		340lm	65lm
Efficiency		142lm/W	21lm/W
LOR		-	19%
UGR		-	-



Beam angle  
-  
Application  
Weight  
1,6Kg

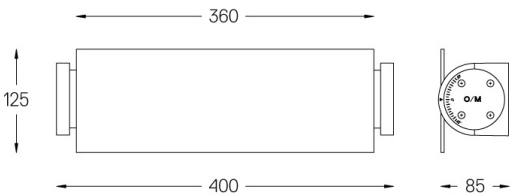

Finishes

.20 Clear

Mandatory

- 16200
- 16210
- 16220
- 16230
- 16240
- 16250