



Desing: Eduardo Souto de Moura

Emergency surface luminaire with body made of aluminium profile with matt finish or electrostatic 100% polyester paint with textured-finish.

Pictogram, with acrylic structure and adhesive film, supplied separately.

The same luminaire allows maintained or non-maintained mode.

Luminaire with self-testing mode.

Prepared for remote control (rest mode).

3-hour autonomy.

Compliant with the following standards:


EN60598-2-22 / EN60598-1 / UNE 20392

Power supply included.

IP22 | 230Vac | 50/60Hz



| LED        | 5000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 2,4W         | 3,1W      |
| Flux       |       | 340lm        | 65lm      |
| Efficiency |       | 142lm/W      | 21lm/W    |
| LOR        |       | -            | 19%       |
| UGR        |       | -            | -         |

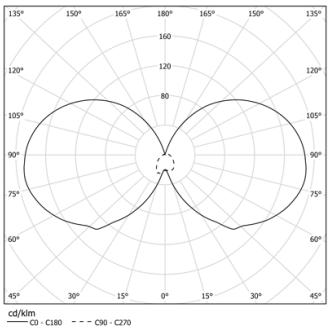


Beam angle

-

Application

Weight

1,5Kg

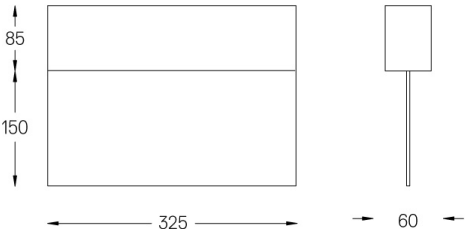

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory

- 16401
- 16442
- 16452
- 16431
- 16421
- 16430

Ordered separately

- 16411