



Desing: Eduardo Souto de Moura

Emergency pendant luminaire with body made of aluminium profile with matt finish or electrostatic 100% polyester paint with textured-finish.

Pictogram, with acrylic structure and adhesive film, supplied separately.

The same luminaire allows maintained or non-maintained mode.

Luminaire with self-testing mode.

Prepared for remote control (rest mode).

3-hour autonomy.

Compliant with the following standards:


EN60598-2-22 / EN60598-1 / UNE 20392

Power supply included.


IP22 | 230Vac | 50/60Hz



LED	5000K	Light Source	Luminaire
Power		2,4W	3,1W
Flux		340lm	65lm
Efficiency		142lm/W	21lm/W
LOR		-	19%
UGR		-	-



Beam angle	-
Application	
Weight	1,5Kg

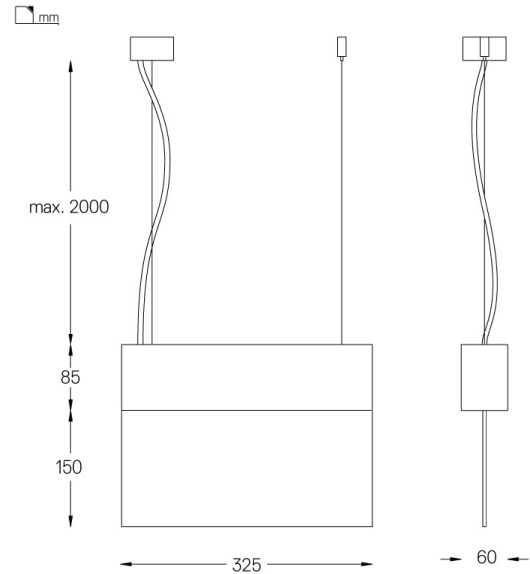

- Finishes
- .01 White / RAL 9010
  - .02 Black / RAL 9005
  - .10 Anodised aluminium

- Mandatory
- 16432 Pendant fitting accessory
  - 16401
  - 16411
  - 16442
  - 16452
  - 16431
  - 16421
  - 16430