



Design: Eduardo Souto de Moura

Emergency pendant luminaire with body made of steel and electrostatic 100% polyester paint with textured finish.

Single sided pictogram, with polycarbonate structure and adhesive film, included.

The same luminaire allows maintained or non-maintained mode.

Luminaire with self-testing mode.

Prepared for remote control (rest mode).

3-hours autonomy.

Compliant with the following standards:

EN60598-2-22 / EN60598-1

Power supply included.

IP44 | IK07 | 230Vac | 50/60Hz



| LED        | 5000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 2,4W         | 3,1W      |
| Flux       |       | 340lm        | 65lm      |
| Efficiency |       | 142lm/W      | 21lm/W    |
| LOR        |       | -            | 19%       |
| UGR        |       | -            | -         |




Beam angle

-

Application

Weight  
2Kg

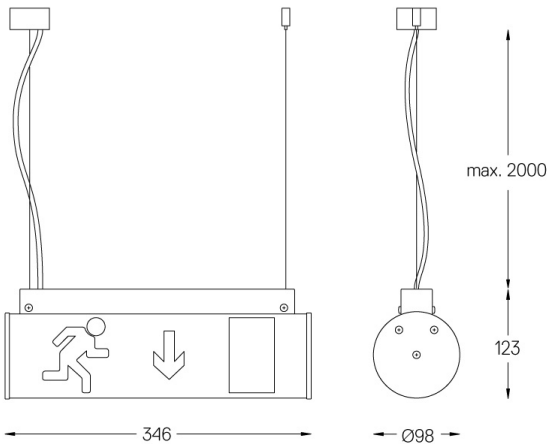

## Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

## Mandatory

54036 Pendant direct fitting accessory

## Optional

56051 Clear Base DALI  
ø60x35mm