



Design: Eduardo Souto de Moura

Emergency pendant luminaire with body made of steel and electrostatic 100% polyester paint with textured finish.

Single sided pictogram, with polycarbonate structure and adhesive film, included.

The same luminaire allows maintained or non-maintained mode.

Luminaire with self-testing mode.

Prepared for remote control (rest mode).

3-hours autonomy.

Compliant with the following standards:

EN60598-2-22 / EN60598-1

Power supply included.

IP44 | IK07 | 230Vac | 50/60Hz



LED	5000K	Light Source	Luminaire
Power		2,4W	3,1W
Flux		340lm	65lm
Efficiency		142lm/W	21lm/W
LOR		-	19%
UGR		-	-




Beam angle

-

Application

Weight  
2Kg

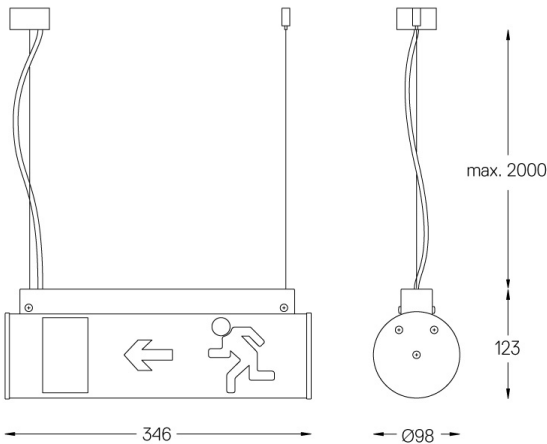

## Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

## Mandatory

54036 Pendant direct fitting accessory

## Optional

56051 Clear Base DALI  
ø60x35mm