



Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules

A Polycarbonate Diffuser

LED Light Sources

B See multiple options

Design: O/M  
Unit=1m, maximum length per segment is 3m.  
Aluminium profile for surface application with 25 micron maximum corrosion resistance anodisation.  
Electrostatic 100% polyester texture-finish paint.



Image not found or type unknown

|            | Light Source | Luminaire |
|------------|--------------|-----------|
| Power      | -            | -         |
| Flux       | -            | -         |
| Efficiency | -            | -         |
| LOR        | -            | -         |
| UGR        | -            | -         |




Beam angle

-

Application



Weight

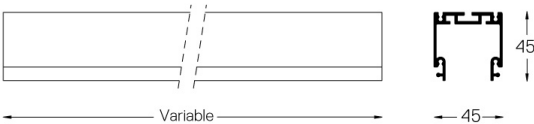

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium