


63W / 5550lm / 4000K / DALI / Diffuse /  
1409mm

44138

Design: O/M  
LED light source with good colour consistency and  
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

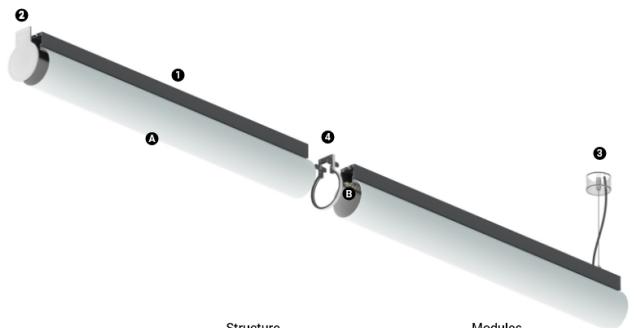

#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Modules

A Polycarbonate Diffuser

#### LED Light Sources

B See multiple options

LED	4000K	Light Source	Luminaire
Power		63W	74,1W
Flux		7900lm	5550lm
Efficiency		125lm/W	75lm/W
LOR		-	70%
UGR		-	<22



Beam angle  
Diffuse

#### Application



Weight  
3,66Kg



#### Finishes

