


38W / 3300lm / 4000K / On/Off / Diffuse /  
845mm

44159

Design: O/M  
LED light source with good colour consistency and  
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

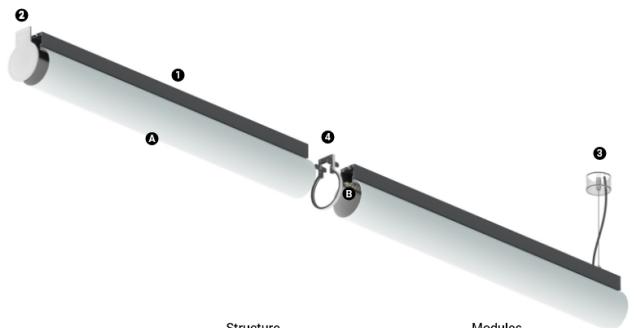

#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Modules

A Polycarbonate Diffuser

#### LED Light Sources

B See multiple options

| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 38W          | 44,7W     |
| Flux       |       | 4750lm       | 3300lm    |
| Efficiency |       | 125lm/W      | 74lm/W    |
| LOR        |       | -            | 69%       |
| UGR        |       | -            | <22       |



Beam angle  
Diffuse

#### Application



Weight  
0,95Kg



#### Finishes

