

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules

- A inFinit module (middle)
- B inFinit module (end)
- C Indirect module

Design: O/M
One 2m steel cable (Ø1,2mm) for infinit pendant
direct/indirect application with millimetric height
adjustment system.
For Start/end



Image not found or type unknown

| | Light Source | Luminaire |
|------------|--------------|-----------|
| Power | - | - |
| Flux | - | - |
| Efficiency | - | - |
| LOR | - | - |
| UGR | - | - |




Beam angle

-

Application

Weight

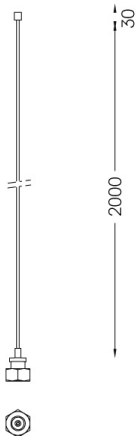

Finishes

.99

Mandatory
59055 Pendant direct/indirect fitting acessory (middle)
56051 Clear Base DALI
ø60x35mm