

9,8W / 860lm / 2700K / DALI / Flood 56° /  
ø85mm

60143



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.

Lightcore optics for defined and perfectly controlled beam of light.

Easy recessing system with spring clips.

Fitting accessories for different applications are available.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz




| LED        | 2700K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 9,8W         | 12,3W     |
| Flux       |       | 955lm        | 860lm     |
| Efficiency |       | 97lm/W       | 70lm/W    |
| LOR        |       | -            | 90%       |
| UGR        |       | -            | <19       |



|             |           |
|-------------|-----------|
| Beam angle  | Flood 56° |
| Application |           |
| Weight      | 0,53Kg    |



Ø78 (trim version)

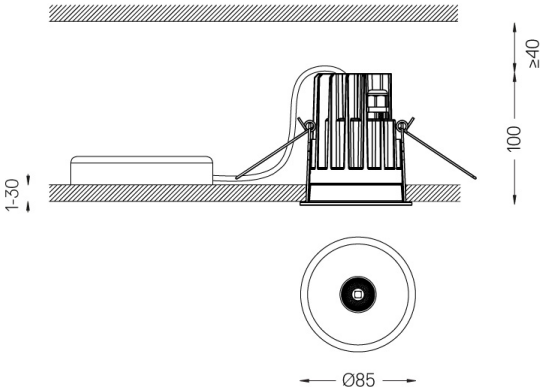

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Optional

- 59014** Accessory 12,5mm ceilings (flush installation)  
150x91x20mm
- 59038** Accessory 10-40mm ceilings (acoustic ceiling)  
156x100x78mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560245H