

O/M

One Asymmetric

9,8W / 880lm / 3000K / DALI / Asymmetric /
ø85mm

60161



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.

Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency.

Fitting accessories for different applications are available.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		9,8W	12,3W
Flux		1035lm	880lm
Efficiency		106lm/W	72lm/W
LOR		-	85%
UGR		-	-



Beam angle
Asymmetric

Application



Weight
0,39Kg



Ø75 (trim version)



Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional


- 59014** Accessory 12,5mm ceilings (flush installation)
150x91x20mm
- 59038** Accessory 10-40mm ceilings (acoustic ceiling)
156x100x78mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F
Model Identifier 4053560099H

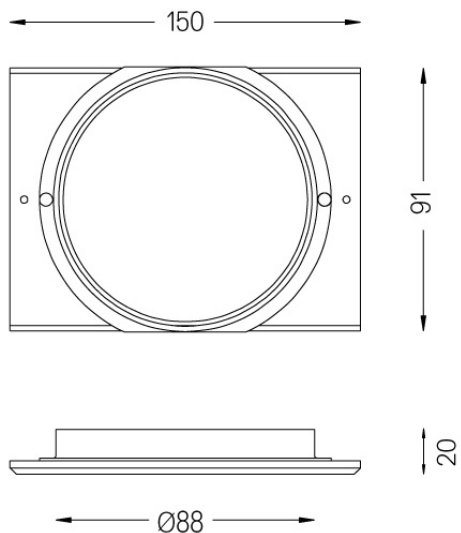

One Asymmetric

Accessory 12,5mm ceilings
(flush installation)

59014

Ø91




One accessory for flush version in
false ceilings.
For 12.5mm ceilings.

Weight
0,01Kg

Finishes
○ .01 White / RAL 9010

One Asymmetric

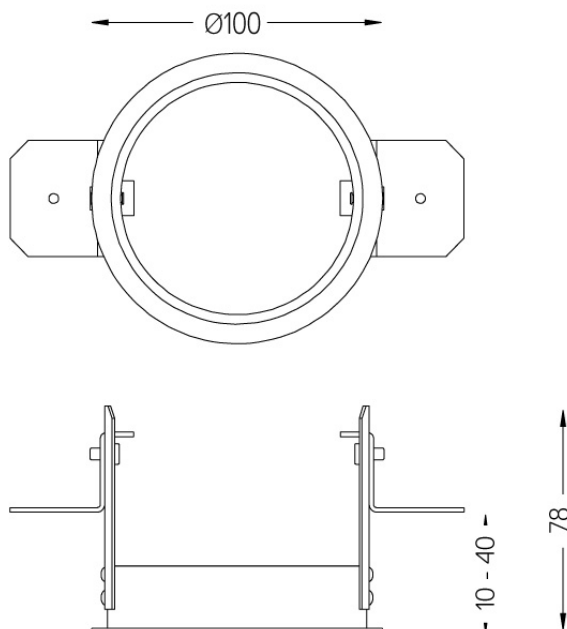

**Recessing accessory for
One. For 10 up to 40mm
ceilings.**

59038



Recessing accessory for One.
For 10 up to 40mm ceilings.

Weight
0,01Kg

Finishes
○ .01 White / RAL 9010
● .02 Black / RAL 9005