

5,6W\* / 320lm\* / 2200K-5000K / DALI /  
Medium 40° / ø85mm

60179




Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Easy recessing system with spring clips.  
Fitting accessories for different applications are available.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included. DALI DT8  
IP20 | 230Vac | 50/60Hz



LED	2200K-5000K	Light Source	Luminaire
Power		5,6W*	7W*
Flux		460lm*	320lm*
Efficiency		82lm/W	46lm/W
LOR		-	70%
UGR		-	<10




Beam angle  
Medium 40°

Application

Weight  
0.53



Ø78 (trim version)

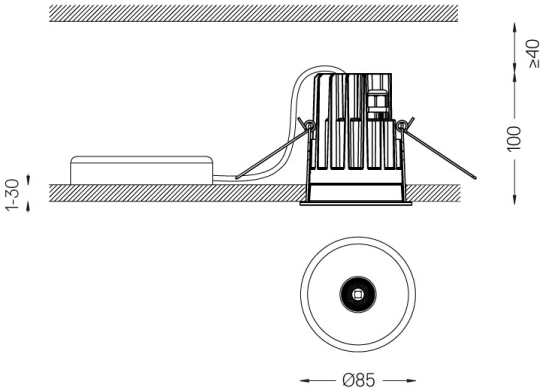

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Optional

- 59014** Accessory 12,5mm ceilings (flush installation)  
150x91x20mm
- 59038** Accessory 10-40mm ceilings (acoustic ceiling)  
156x100x78mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com