

4,5W / 380lm / 3000K / DALI / Medium 40° /  
ø95mm

60236



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with die-cast aluminium body and heat sink.

Orientable by 30° on the horizontal axis and 355° on the vertical axis.

Reflector built based on micro surfaces with complex geometry coated with aluminium alloy, creating a high-gloss, entirely mirrored surface. Accurate reflector for a defined and controlled beam of light, achieving the maximum efficiency.

Reduced height <67mm.

Recessing accessory for trimless version supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED 3000K  | Light Source | Luminaire |
|------------|--------------|-----------|
| Power      | 4,5W         | 5,8W      |
| Flux       | 520lm        | 380lm     |
| Efficiency | 116lm/W      | 66lm/W    |
| LOR        | -            | 73%       |
| UGR        | -            | <10       |



Beam angle  
Medium 40°


Application



Weight  
0,42Kg



Ø90 (trim version)

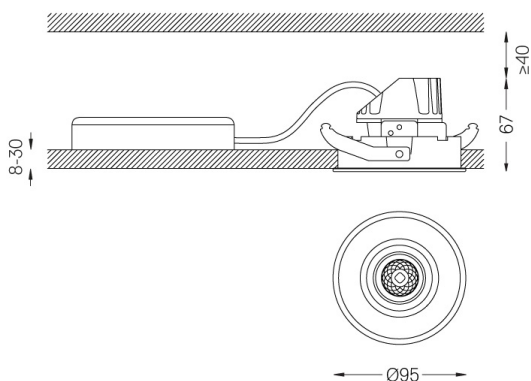

#### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .21 Black+White

#### Optional

**59015** Accessory 12,5mm ceilings (flush installation)  
150x101x20mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560257L