




Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with die-cast aluminium body and heat sink.  
Orientable by 30° on the horizontal axis and 355° on the vertical axis.  
Reflector built based on micro surfaces with complex geometry coated with aluminium alloy, creating a high-gloss, entirely mirrored surface. Accurate reflector for a defined and controlled beam of light, achieving the maximum efficiency.  
Reduced height <67mm.  
Recessing accessory for trimless version supplied separately.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 4,5W         | 5,8W      |
| Flux       |       | 620lm        | 460lm     |
| Efficiency |       | 138lm/W      | 80lm/W    |
| LOR        |       | -            | 74%       |
| UGR        |       | -            | <10       |



Beam angle  
Medium 40°


Application



Weight  
0,42Kg



Ø90 (trim version)

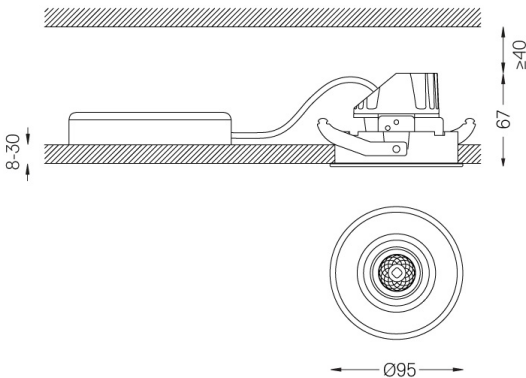

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .21 Black+White

### Optional

59015 Accessory 12,5mm ceilings (flush installation)  
150x101x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

### Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier 2053560247L