



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with die-cast aluminium body and heat sink.

Ortable by 30° on the horizontal axis and 355° on the vertical axis.

Reflector built based on micro surfaces with complex geometry coated with aluminium alloy, creating a high-gloss, entirely mirrored surface. Accurate reflector for a defined and controlled beam of light, achieving the maximum efficiency.

Reduced height <67mm.


Recessing accessory for trimless version supplied separately.


LED CRI>80 / >50.000h, L80/B10

2-step MacAdam / Power supply included.

IP20 | 230Vac | 50/60Hz



 LED	4000K	Light Source	Luminaire
Power	4,5W		5,8W
Flux	620lm		460lm
Efficiency	138lm/W		80lm/W
LOR	-		74%
UGR	-		<10



Beam angle  
**Medium 40°**


## Application



Weight  
0,42Kg



Ø90 (trim version)

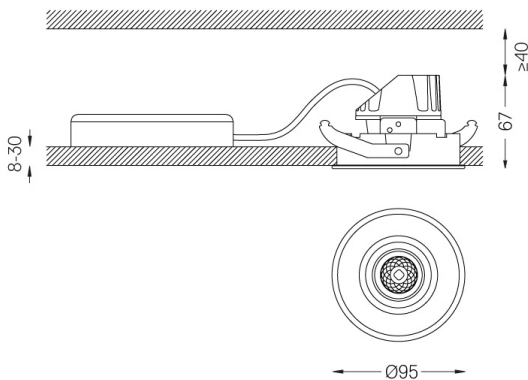

## Finishes

- ☐ .01 White / RAL 9010  
☒ .02 Black / RAL 9005  
☐ .21 Black+White

## Optional

**59015** Accessory 12,5mm ceilings (flush installation)  
150x101x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier 2053560247L