

4,5W / 460lm / 4000K / On/Off / Medium  
41° / ø85mm

60260




Design: O/M + Bartenbach GmbH  
Surface spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish.  
Spot-lens with individual complex surface ribs to provide a focal light and an extremely narrow beam.  
Orientable by 90° horizontal rotation and 330° vertical rotation.  
Driver included.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz




| LED 4000K           | Light Source | Luminaire |
|---------------------|--------------|-----------|
| Power               | 4,5W         | 5,8W      |
| Flux                | 620lm        | 460lm     |
| Efficiency          | 138lm/W      | 80lm/W    |
| LOR                 | -            | 74%       |
| Operating Condition | -            | 230Vac    |

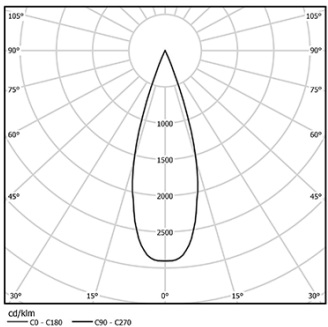

Beam angle  
Medium 41°

Application

Weight  
0,64Kg

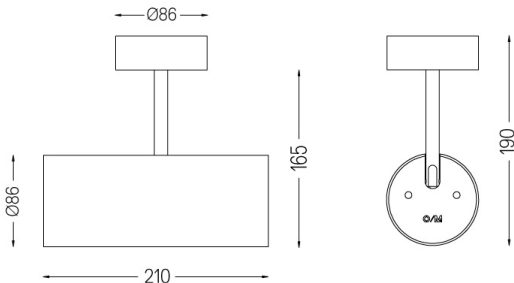

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier 2053560247L