

10W / 780lm / 3000K / DALI / Flood 37° /
ø75mm

60345



Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz




| LED | 3000K | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power | 10W | | 12,5W |
| Flux | 1035lm | | 780lm |
| Efficiency | 104lm/W | | 62lm/W |
| LOR | - | | 75% |
| UGR | - | | <22 |



Beam angle
Flood 37°


Application



Weight
0,38Kg



Ø70 (trim version)

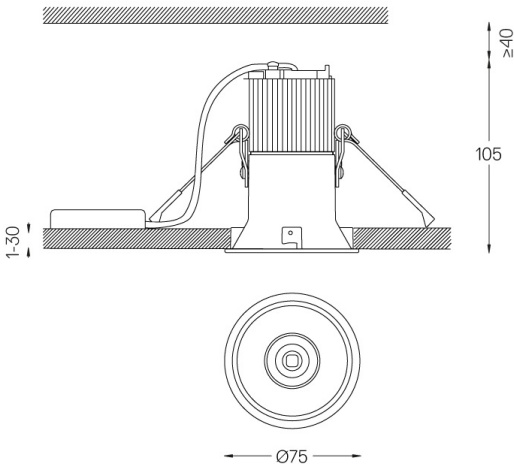

- Finishes
- .04 Matt White
 - .05 Matt Black

Optional

59063 Flush accessory (12.5mm ceilings)
176x17mm

59064 Flush accessory (15mm ceilings)
176x19,5mm

59065 Flush accessory (25mm ceilings)
176x29,5mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F Model Identifier 2053560257H