




Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing accessory for flush version supplied separately.


LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		2,2W	2,8W
Flux		305lm	270lm
Efficiency		139lm/W	96lm/W
LOR		-	89%
UGR		-	<10

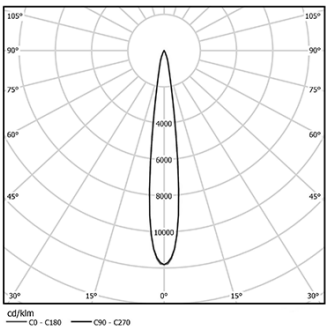

Beam angle  
Spot 14°  
Application  
Weight  
0,38Kg

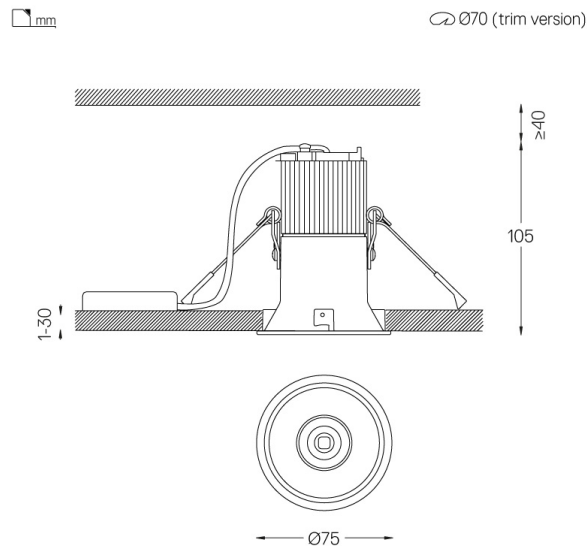

Finishes  
○ .04 Matt White  
● .05 Matt Black

Optional  
59063 Flush accessory (12.5mm ceilings)  
176x17mm  
59064 Flush accessory (15mm ceilings)  
176x19,5mm  
59065 Flush accessory (25mm ceilings)  
176x29,5mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier 4053560282