

19W / 2160lm / 4000K / On/Off / Flood 46° /  
ø100mm

60383



Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.

Recessing accessory for flush version supplied separately.


LED CRI>80 / >50.000h, L80/B10  
3-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 4000K   | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power      | 19W     | 23,2W        |           |
| Flux       | 2740lm  | 2160lm       |           |
| Efficiency | 144lm/W | 93lm/W       |           |
| LOR        | -       | 79%          |           |
| UGR        | -       | <22          |           |



|                         |
|-------------------------|
| Beam angle<br>Flood 46° |
| Application<br>         |
| Weight<br>0,5Kg         |

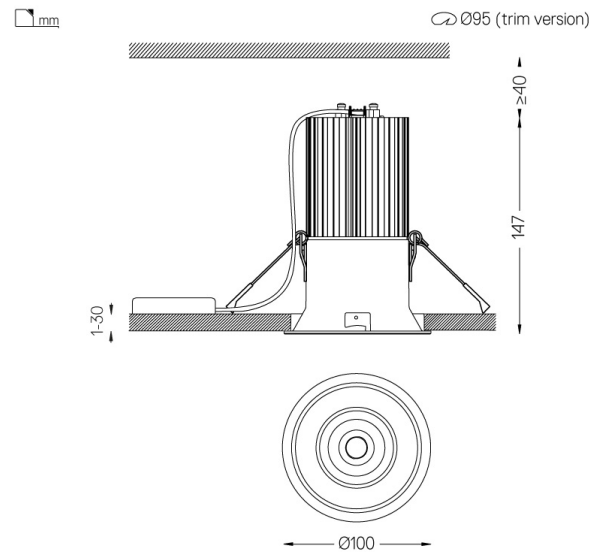

- Finishes
- .04 Matt White
  - .05 Matt Black

- Optional
- 59066 Flush accessory (12.5mm ceilings)  
201x17mm
  - 59067 Flush accessory (15mm ceilings)  
201x19,5mm
  - 59068 Flush accessory (25mm ceilings)  
201x29,5mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier BXR-40E2000-C-73