

Beam  
IP542,2W / 170lm / 2700K / On/Off / Spot 14° /  
ø75mm

60392



Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.

Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / power supply included  
IP54 | 230Vac | 50/60Hz

LED	2700K	Light Source	Luminaire
Power		2,2W	2,8W
Flux		200lm	170lm
Efficiency		91lm/W	60lm/W
LOR		-	85%
UGR		-	<10

Beam angle  
Spot 14°

Application

Weight  
0,38Kg

Ø70 (trim version)



Finishes

- .04 Matt White
- .05 Matt Black

Optional

- 59063** Flush accessory (12.5mm ceilings)  
176x17mm
- 59064** Flush accessory (15mm ceilings)  
176x19,5mm
- 59065** Flush accessory (25mm ceilings)  
176x29,5mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 4053560279

## Beam IP54

Flush accessory (12.5mm  
ceilings)

59063



Ø88



Flush accessory Beam ø75  
For 12.5mm ceilings.

Weight  
0,05Kg

Finishes  
.99


## Beam IP54

Flush accessory (15mm  
ceilings)

59064



Ø88

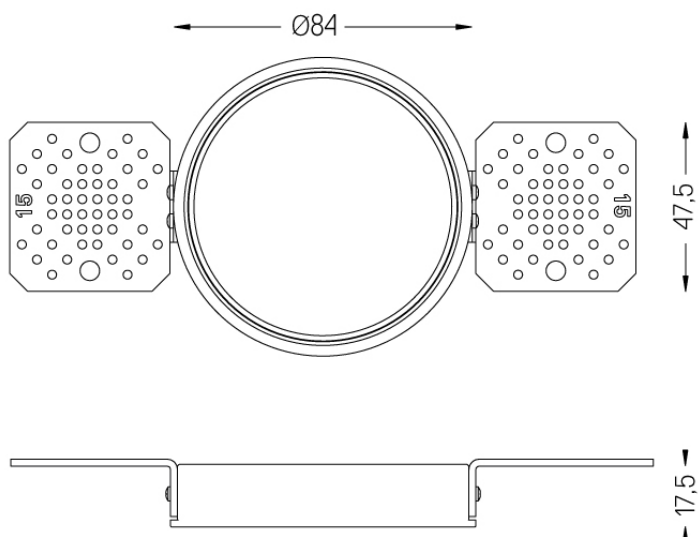

Flush accessory Beam ø75  
For 15mm ceilings.

Weight  
0,05Kg

Finishes  
.99

## Beam IP54

Flush accessory (25mm  
ceilings)

59065



Ø88



Flush accessory Beam Ø75  
For 25mm ceilings.

Weight  
0,05Kg

Finishes  
.99