

## Beam IP54

**10W / 520lm / 2700K / On/Off / Diffuse /  
ø75mm**

60398




Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / power supply included  
IP54 | 230Vac | 50/60Hz



 LED	2700K	Light Source	Luminaire
Power	10W		12,5W
Flux	955lm		520lm
Efficiency	96lm/W		42lm/W
LOR	-		54%
UGR	-		<28



Beam angle  
**Diffuse**


## Application



Weight  
**0,38Kg**



070 (trim version)

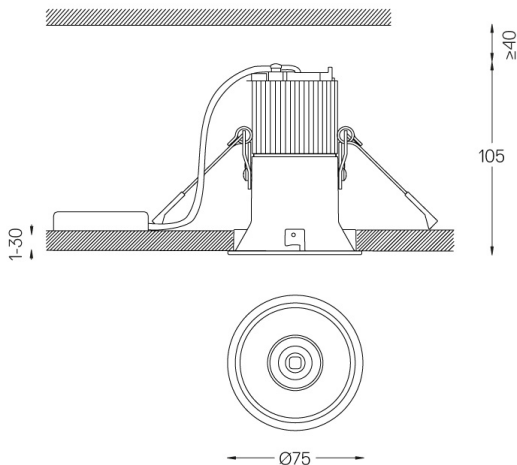

## Finishes

☐ .04 Matt White

● .05 Matt Black

Optional

**59063 Flush accessory (12.5mm ceilings)**

176x17mm

**59064 Flush accessory (15mm ceilings)**

176x19,5mm

**59065 Flush accessory (25mm ceilings)**

176x29,5mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560245H