

## Beam IP54

2,2W / 170lm / 2700K / DALI / Spot 14° /  
ø75mm

60399

Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / power supply included  
IP54 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power	2,2W		2,8W
Flux	200lm		170lm
Efficiency	91lm/W		60lm/W
LOR	-		85%
UGR	-		<10



Beam angle  
Spot 14°

Application



Weight  
0,38Kg



Ø70 (trim version)



### Finishes

- .04 Matt White
- .05 Matt Black

### Optional

- 59063** Flush accessory (12.5mm ceilings)  
176x17mm
- 59064** Flush accessory (15mm ceilings)  
176x19,5mm
- 59065** Flush accessory (25mm ceilings)  
176x29,5mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com  
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 4053560279

## Beam IP54

Flush accessory (12.5mm  
ceilings)

59063



Ø88



Flush accessory Beam ø75  
For 12.5mm ceilings.


Weight  
0,05Kg

Finishes  
.99

## Beam IP54

Flush accessory (15mm  
ceilings)

59064

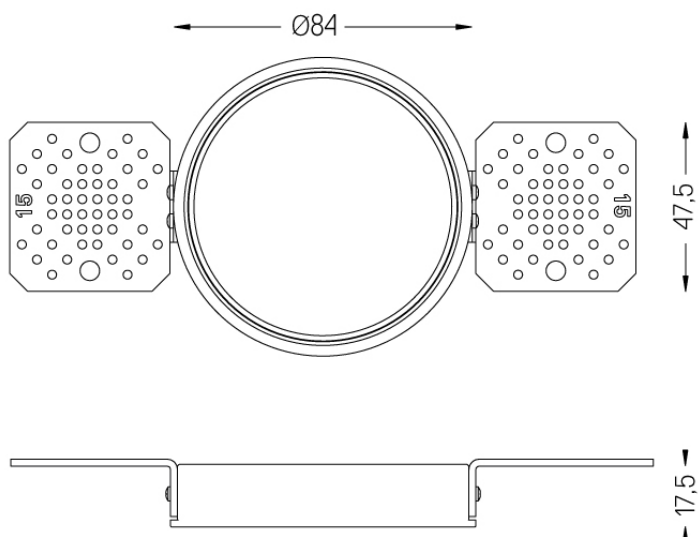

Flush accessory Beam  $\varnothing 75$   
For 15mm ceilings.

Weight  
0,05Kg

Finishes  
.99

## Beam IP54

Flush accessory (25mm  
ceilings)

59065



Ø88



Flush accessory Beam ø75  
For 25mm ceilings.

Weight  
0,05Kg

Finishes  
.99